






## Switch Plate Adjustment (Fully Closed Position)

1. Remove the headliner (see page 20-42).
2. Using the moonroof wrench, close the glass fully.  
  
NOTE: Check the glass fit to the roof panel.
3. Using an open-end wrench, loosen the switch plate mounting bolts.
4. Adjust position of the switch plate (switch cam) as shown.
5. Check the operation of the glass (from tilt-up position to fully closed position, from the fully open position to the fully closed position) by operating the moonroof switch.

NOTE: Check the glass height (see page 20-31).

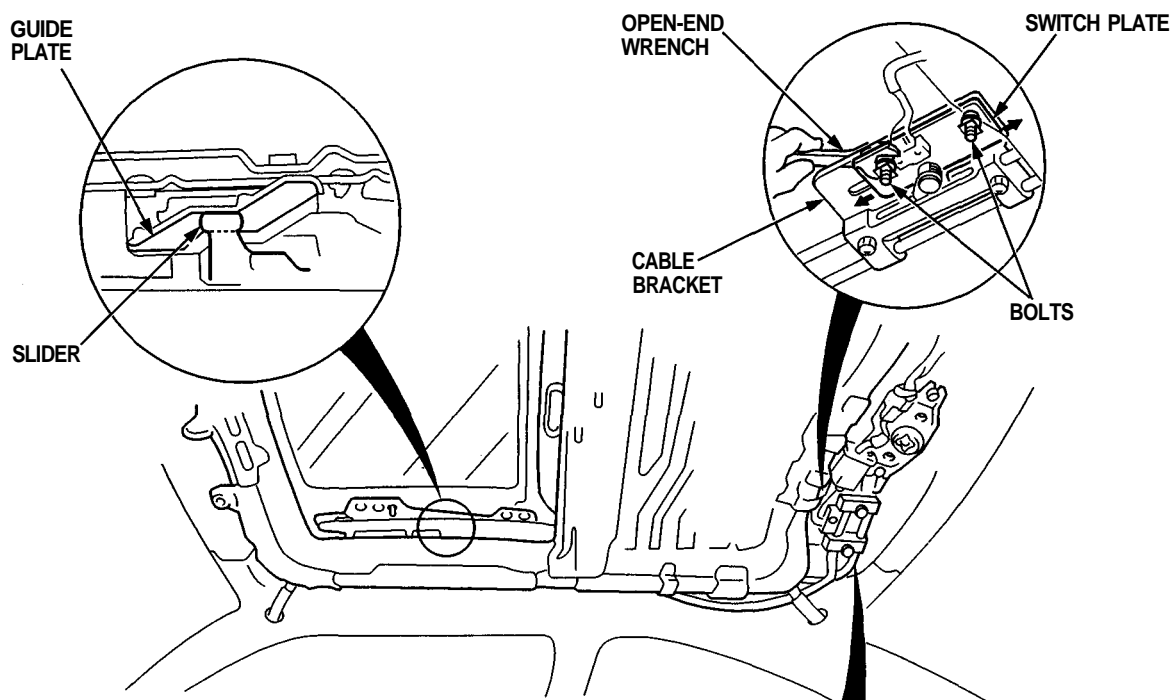

Check the switch plate contacts the cable bracket.

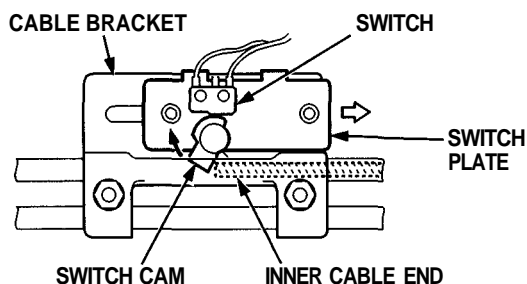

While moving the switch plate little by little, secure the switch plate at the position where the switch cam contacts the switch (a faint click is heard).

6. Close the glass fully, and check for water leaks.

NOTE: Do not use high-pressure water.