

## TOOLS AND SUPPLIES REQUIRED


Flat-tip screwdriver  
T-30 Torx bit  
Tape measure  
Blanket  
File  
Approx. 120 mm height empty cardboard box  
Eye protection (safety goggles, face shield, etc.)  
Torque wrench  
Drill  
3 mm and 6 mm Drill bits  
Ruler  
Felt-tip pen

*The following tools are available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search". Or, call 888-424-6857.*

Air saw (T/N AT192A)

Plastic Trim Tool (T/N SILTRIMTL10)

### **Illustration of the Roof Rails on the Vehicle**

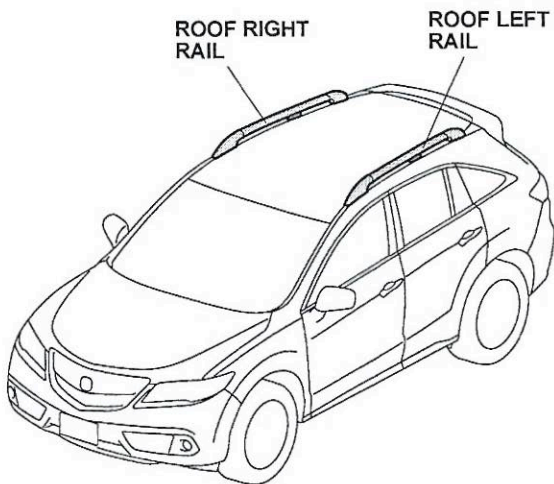

## INSTALLATION

**Client Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

### NOTE:

- Do not damage the roof and other finished surfaces of the body when installing the roof rails.
- Do not interchange the front and rear parts or the right and left parts.

1. Open the tailgate halfway. Using a plastic trim tool, pry up the rear edge of the roof left molding cover.

