

<p>Accessory</p> <p>SPLASH GUARDS P/N 08P00-TJB-200</p>	<p>Application</p> <p>2019 RDX</p>	<p>Publications No.</p> <p>VERSION 1</p>
		<p>Issue Date</p> <p>MAY 2018</p>

PARTS LIST

Left front splash guard



Right front splash guard



Left rear splash guard



Right rear splash guard



Left bracket
(Identification mark: L)



Right bracket
(Identification mark: R)



22 Self-tapping screws




6 Spring nuts



TOOLS AND SUPPLIES REQUIRED

- Phillips screwdriver
- Stubby Phillips screwdriver
- Utility knife
- Pushpin

Illustration of the Splash Guards on the Vehicle

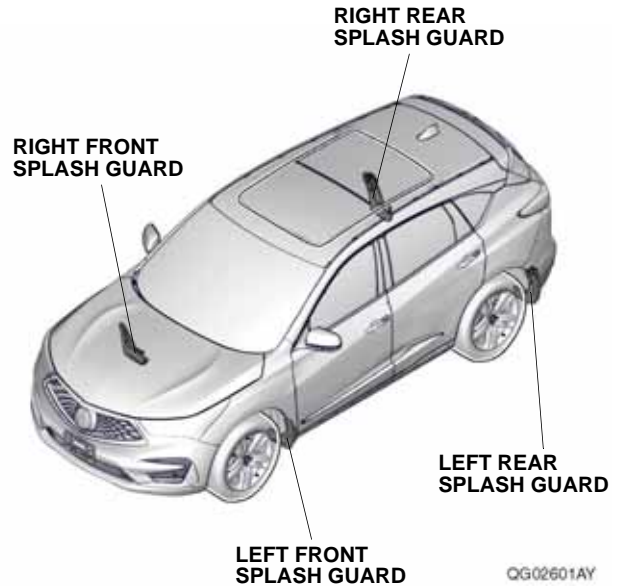

INSTALLATION


Client Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”

NOTE:

- Be careful not to damage the paint finish.
- Clean the areas to be covered.


Installing the Front Splash Guards

1. Turn the steering wheel fully counterclockwise.

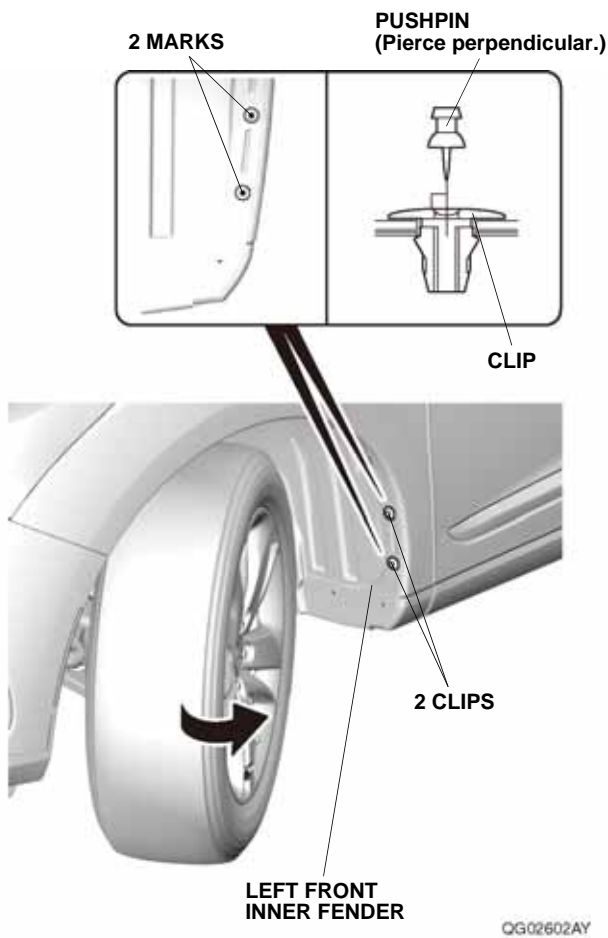


2. Using a pushpin, pierce the center of the two clips on the left front inner fender.
NOTE: Make sure to pierce the clips perpendicular.

3. Remove the two self-tapping screws from the left front inner fender.

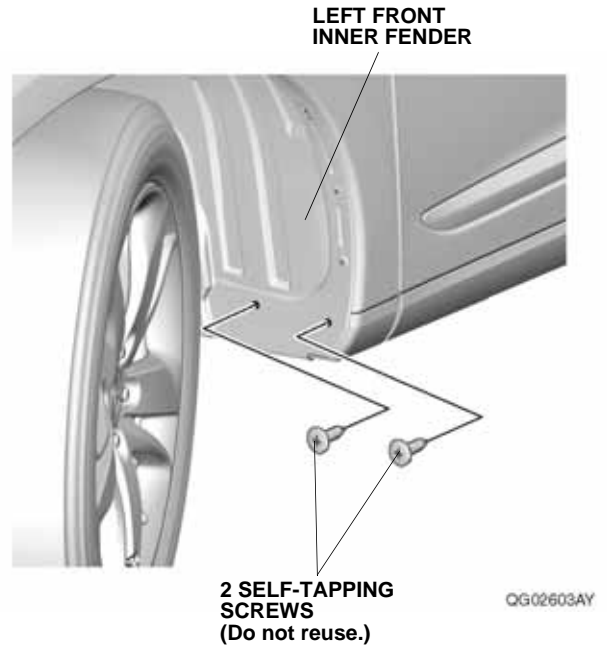


- Loosely install the left front splash guard to the left front inner fender with the four self-tapping screws supplied.

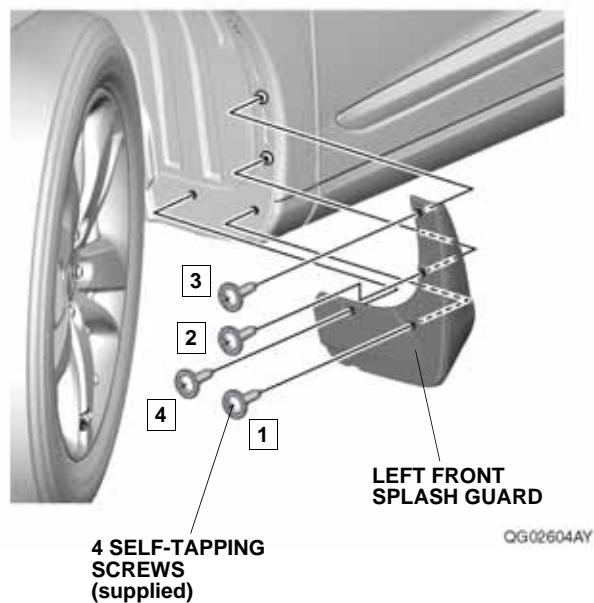


- While holding the left front splash guard against the left front inner fender, tighten the four self-tapping screws as shown.
NOTE: Make sure there are no gaps between the left front splash guard and the vehicle body. If there is a gap, loosen the self-tapping screws, hold the splash guard against the body, and tighten the screws.
- Turn the steering wheel fully clockwise, and repeat steps 2 through 5 on the right side of the vehicle.

Installing the Rear Splash Guards

- Remove the two self-tapping screws from the left rear inner fender.

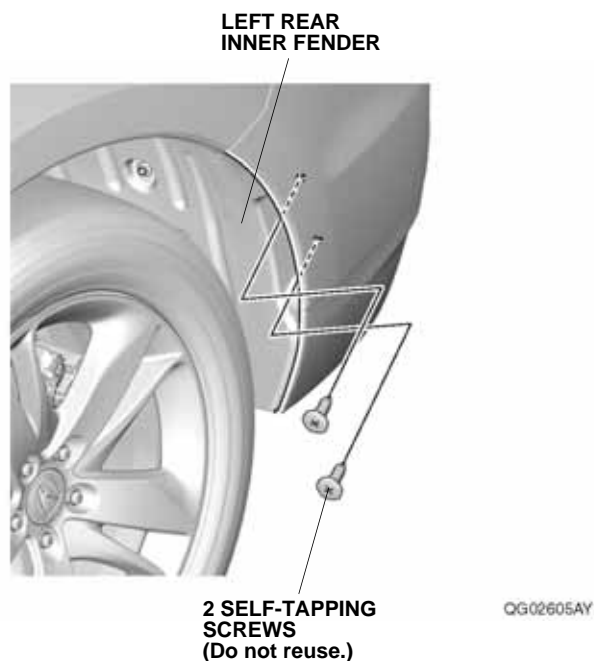


8. Using a pushpin, pierce the center of the two dimples in the left rear inner fender.
NOTE: Make sure to pierce the left rear inner fender perpendicular.

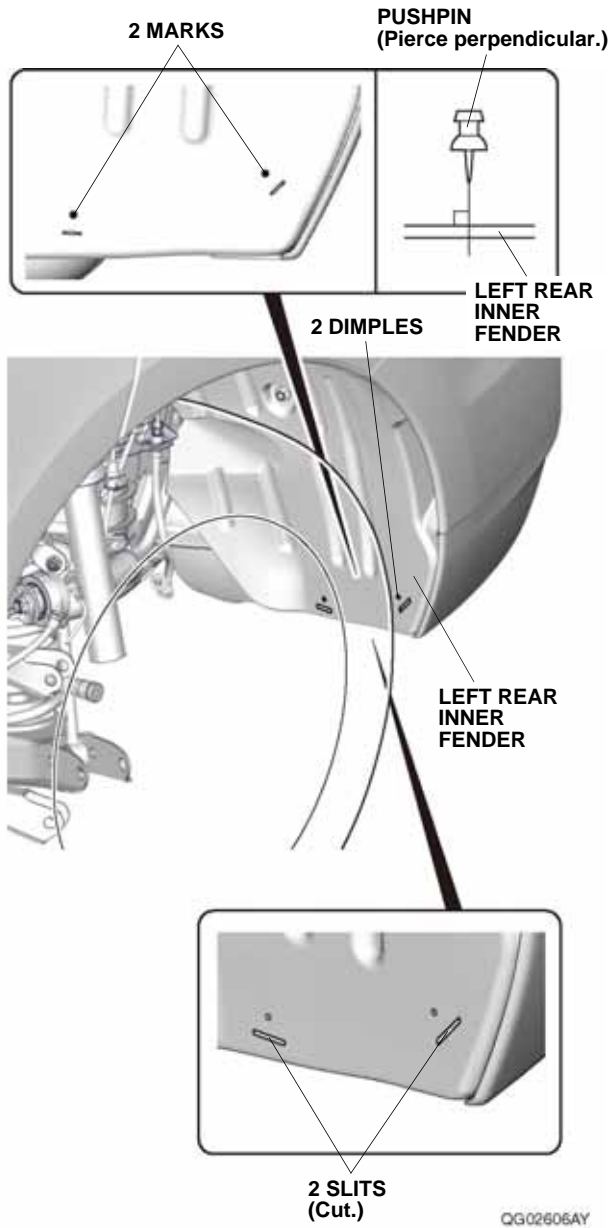


9. Using a utility knife, cut the two slits in the left rear inner fender.


10. Install the two spring nuts to the slits cut in step 9.
NOTE: Make sure you install the spring nuts with the large hole facing out.

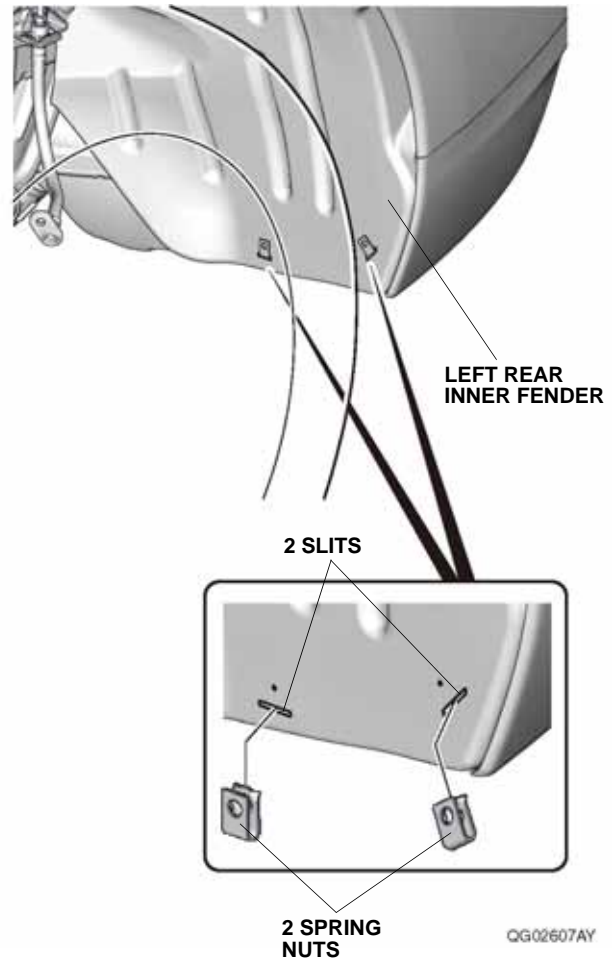


11. Peel back the left rear inner fender, and remove the spring nut.

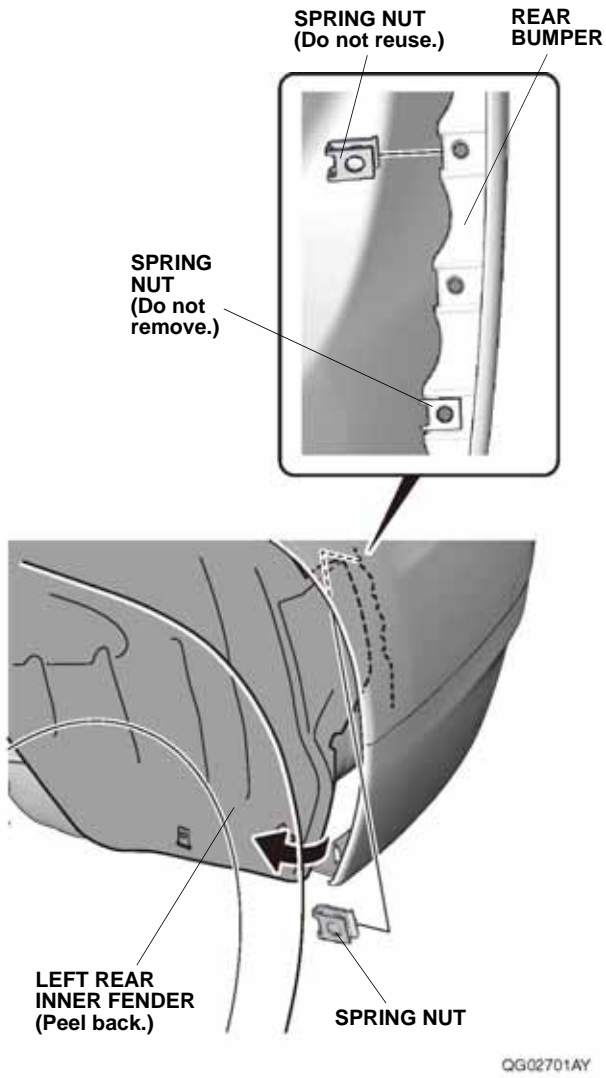


12. Install one spring nut to the rear bumper as shown. NOTE: Make sure you install the spring nut in the correct position and with the large hole facing out.

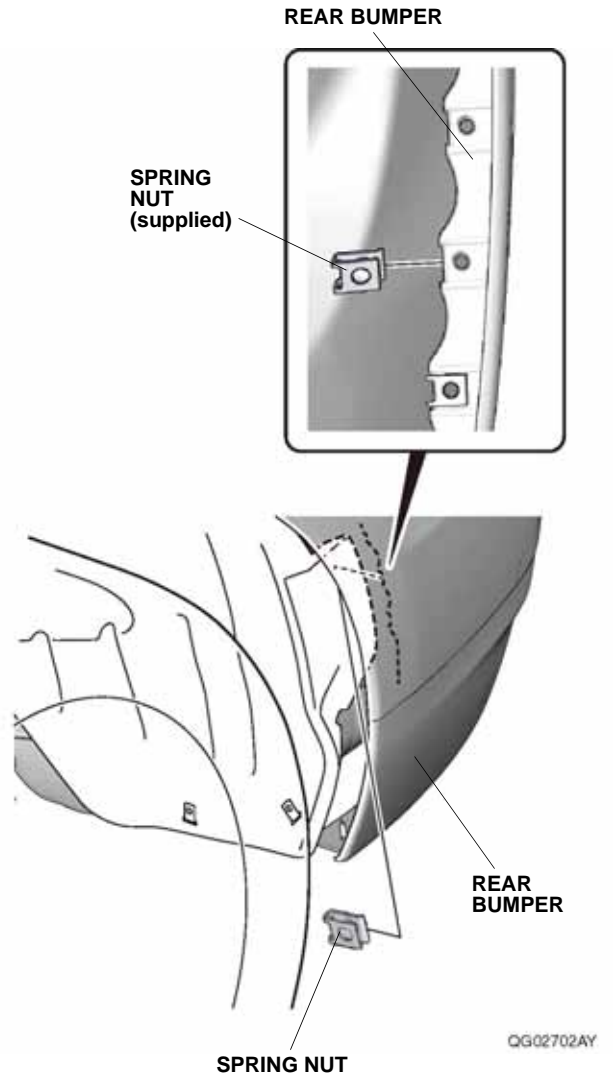


13. Install the left bracket to the left rear inner fender and rear bumper with two self-tapping screws supplied.

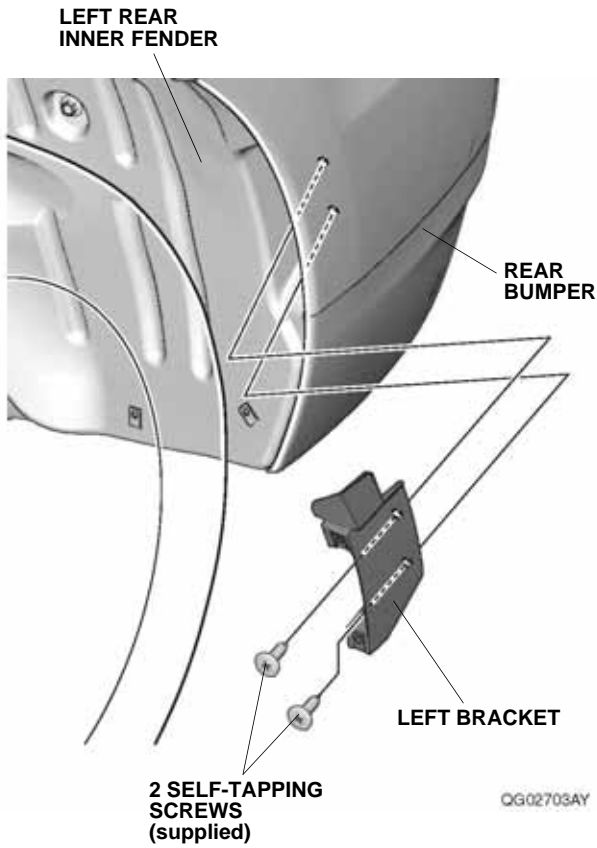


14. Loosely install the left rear splash guard to the left bracket and left rear inner fender with the four self-tapping screws supplied.

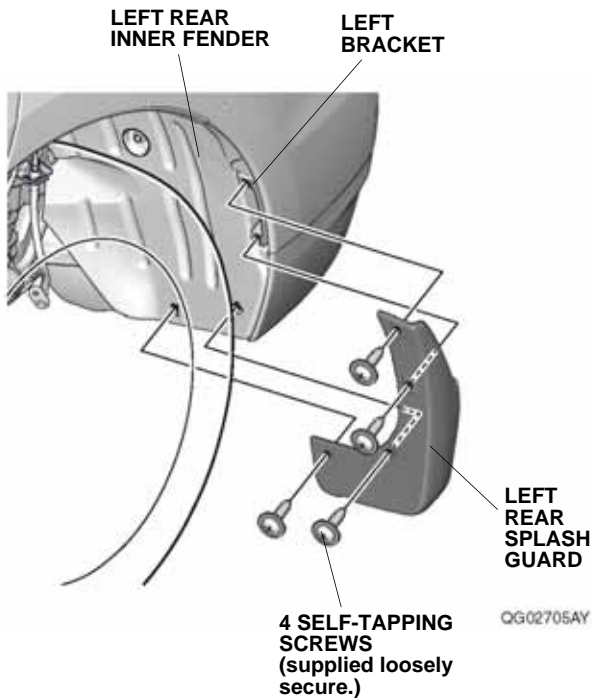

15. Loosely secure the left rear splash guard to the rear bumper with the self-tapping screw supplied.

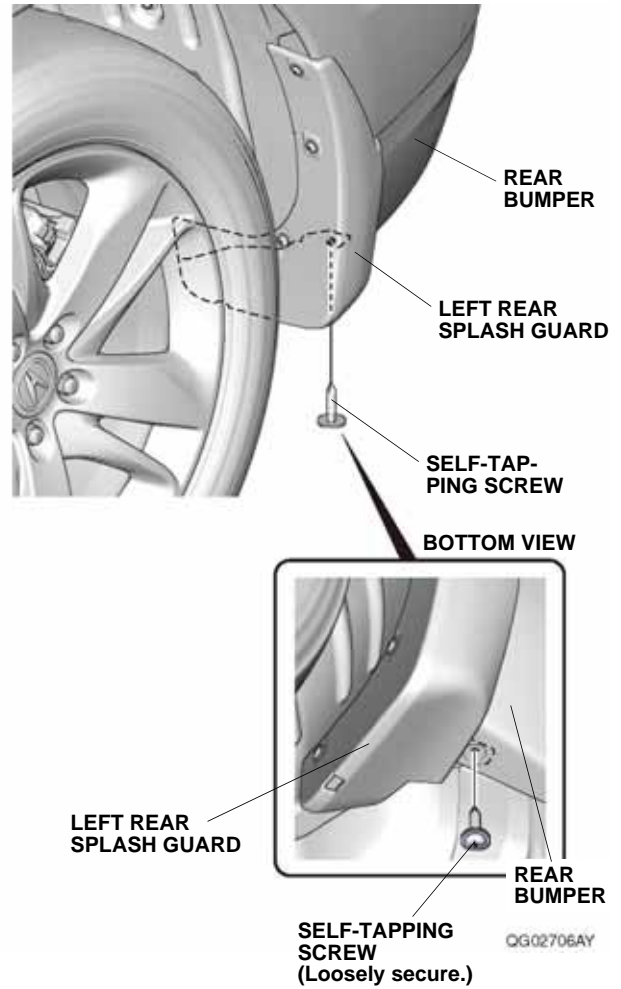

16. While holding the left rear splash guard against the rear bumper and left rear inner fender, tighten the four self-tapping screws in the order shown.
NOTE: Make sure there are no gaps between the left rear splash guard and the vehicle body. If there is a gap, loosen the self-tapping screws, hold the splash guard against the body, and tighten the screws.

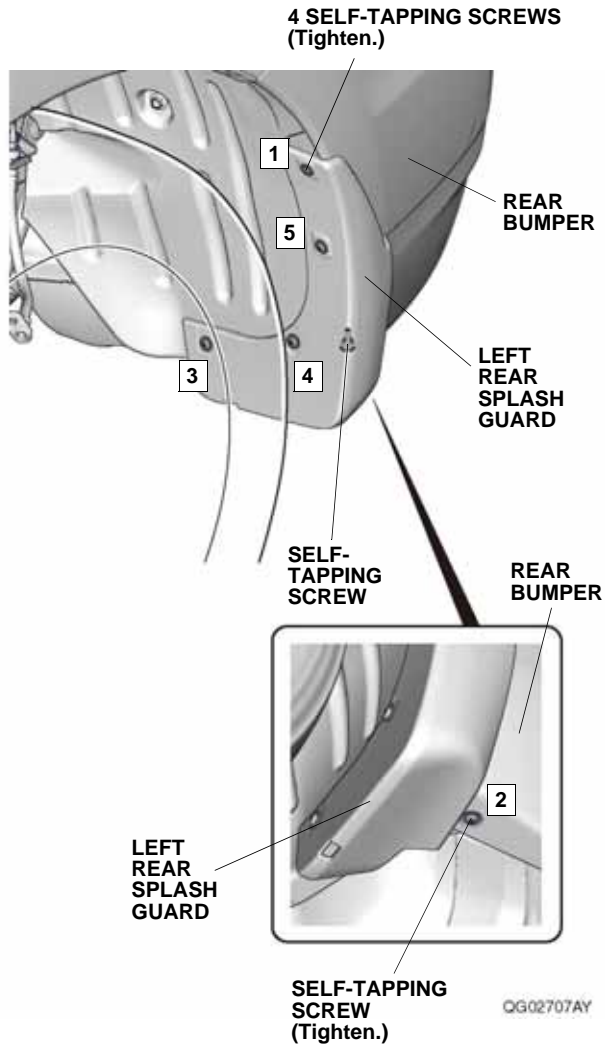

17. Repeat steps 7 through 16 on the right side of the vehicle.