

Front Door Sash Inner Trim Removal and Installation


Removal/Installation

1. Front Door Panel - Remove

2. Front Door Sash Inner Trim - Remove

Fastener Location

▷ : 1

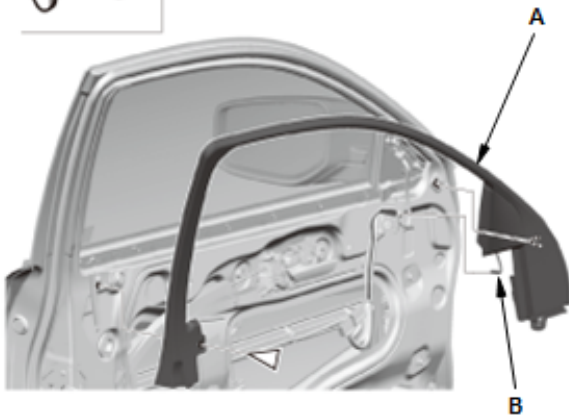

1. Remove the front door sash inner trim (A).
2. With BSI: Disconnect the connector (B).

3. All Removed Parts - Install

1. Install the parts in the reverse order of removal.