


Stereo Amplifier Removal and Installation

Removal/Installation

1. Driver's Dashboard Lower Cover - Remove

2. Stereo Amplifier - Remove

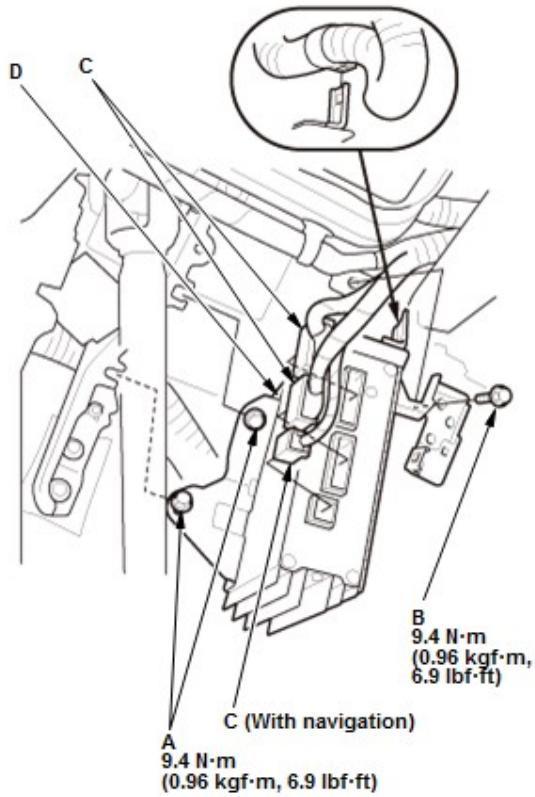

1. Loosen the bolts (A).
2. Remove the bolt (B).
3. Disconnect the stereo amplifier connectors (C).
4. Remove the stereo amplifier (D).

3. All Removed Parts - Install

1. Install the stereo amplifier in the reverse order of removal.