


Taillight Removal and Installation

Removal/Installation

1. Taillight - Remove

Brake Light: LED
Taillight: LED
Rear Side Marker Light: LED
Rear Turn Signal Light: 21 W

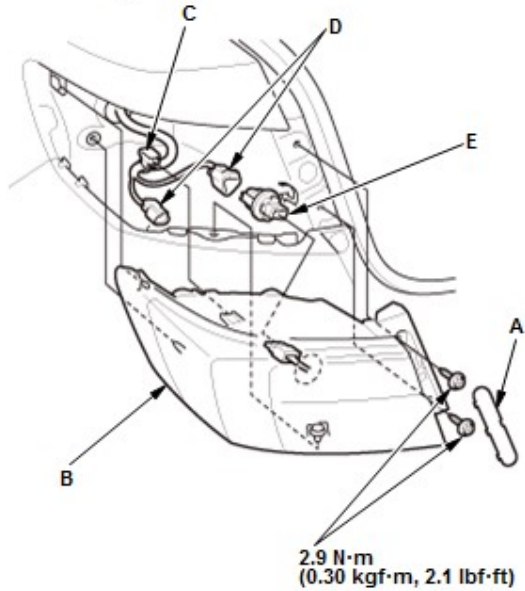

1. Remove the cover (A).
2. Remove the taillight (B).
3. Remove the harness clip (C).
4. Disconnect these connectors (D):
 - Brake light/taillight/rear side marker light connector
 - Rear turn signal light connector
5. Remove the socket (E).

2. All Removed Parts - Install

1. Install the parts in the reverse order of removal.